

## Adjustable Spray Foam/Water Nozzle

### Description

The FSN-25 is a 25mm fog nozzle with variable spray angle and adjustable flow rate. The nozzle spray pattern is adjustable by moving the outer sleeve (shaper) in and out and locking it in place with two grub screws. The spray pattern can be adjusted from 120 degree include dangle spray to a straight jet.


The FSN-25 can also have the flow rate adjusted between 0 and 500 lpm in the field by using one 6mm Allen key.

The operating pressure range for the nozzles is 100 kPa to 700 kPa.

Fixed flow versions are also available.



Model Number	Part Number	Nominal Flow @ 700 kPa	Inlet 1" NPT	Weight	Length
FSN-25 Spray Nozzle	14308	0-500 lpm	Female	475 gm	57-61mm

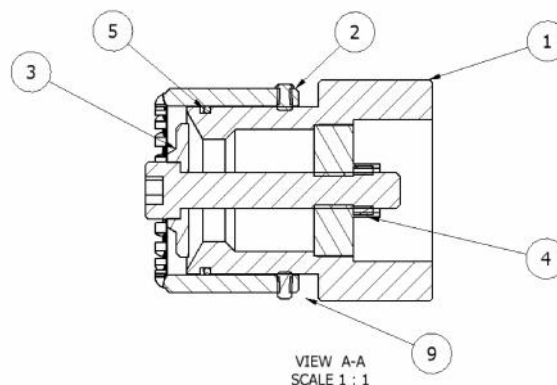

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	14308/1	FSN-25 Body
2	1	14308/2	FSN-25 Shaper
3	1	14308/4	FSN-25 Stem
4	1	14308/R	FSN-25 Retainer Assembly
5	1	10310/28	O-Ring BS-028
9	2	DIN 913 M4x6	socket head cap screw 316SS
10	1	SH Cap-metric-316SS	DIN 912 - M8x1 L= 50

**ORION SAFETY INDUSTRIES PTY LIMITED**

ABN 80 002 538 696

26A LYN PARADE PRESTONS NSW 2170 AUSTRALIA

Tel (61) 2 9426 7900 FAX (61) 2 8783 5400

Visit our Website [www.orionsafety.com.au](http://www.orionsafety.com.au) Email: [sales@orionsafety.com.au](mailto:sales@orionsafety.com.au)