


Water Oscillating Monitor Commando Model 3522

Description

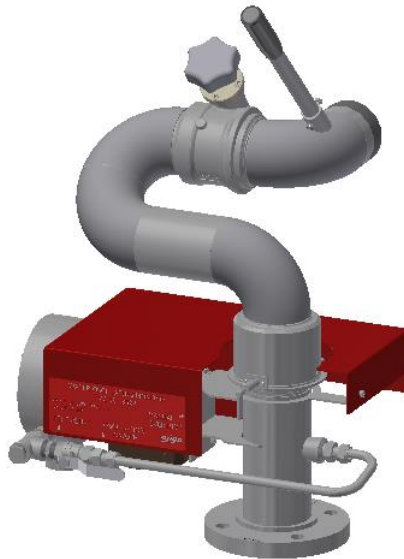

The Commando model 3522 is an 80mm water oscillating monitor designed specifically for offshore applications. It is based on our Commando water way. The Model 3522 has a friction swivel lock and a Pelton turbine oscillating unit. It features a bronze and stainless steel gearbox for a long, low maintenance life in high corrosion environments. The material for the waterway can be any readily available grade of stainless steel or titanium. Standard is 316L.

All metal components which are exposed to water / foam solution are made from stainless steel or bronze. The arc of movement is 120 degrees (maximum) and is fully adjustable down to 30 degrees. The operating pressure range for these units is 400 kPa to 1,400 kPa. The maximum recommended flow is 4,500 lpm.

In general, our stainless steel monitors are not painted as standard but the cover is painted red. Full painting is an option.

Specifications

Height:	750mm approx. (depends on handle position)
Width:	510mm
Depth:	390mm + nozzle
Nozzle Height:	485mm (to centre line of nozzle, varies with flanges)

ORION FIRE ENGINEERING PTY LIMITED


ABN 80 002 538 696

26A LYN PARADE PRESTONS NSW 2170 AUSTRALIA

Tel (61) 2 9426 7900 FAX (61) 2 8783 5400

Visit our Website www.orion-fire.com.au Email: sales@orion-fire.com.au

Performance Data

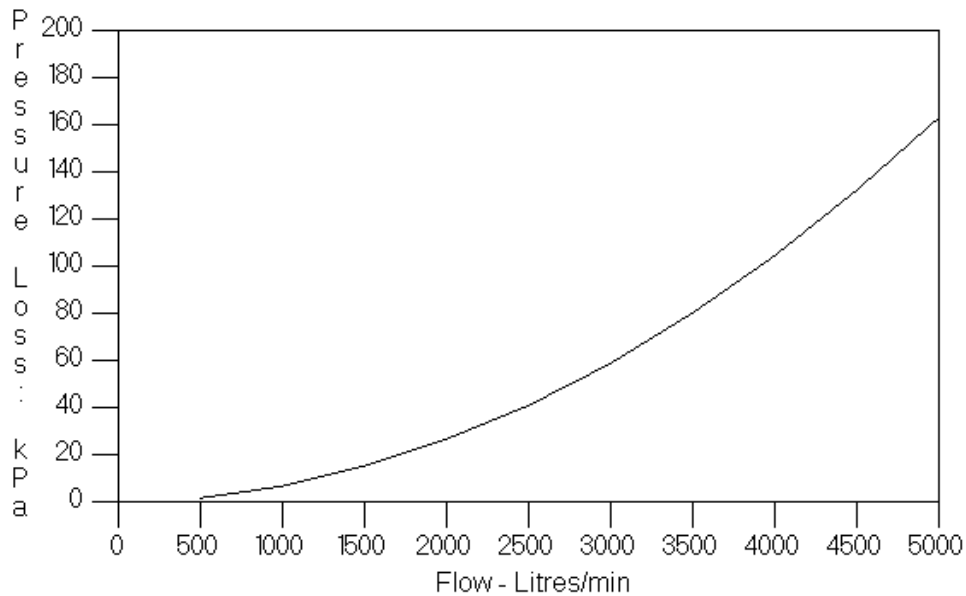

Operating Pressures:	400 kPa - 1,400 kPa
Hydrostatic Test Pressure:	2,400 kPa
Flow Range:	up to 4,500 lpm
Elevation Adjustment:	-60° to +60° (standard)
Horizontal Sweep:	Adjustable from 30° to 120° (auto) 360 degrees on manual
Oscillating Speed:	6-8 cycles/minute max
Oscillating Unit Water Consumption:	40 litres per minute (approx.)
Inlet Flange:	3" ANSI #150
Outlet Connection:	80mm BSP Male
Weight:	35 kg (excluding nozzle)

Materials of Construction

Component	Material
Monitor water way	316LSS
Inlet flange	316LSS
Turbine impeller	316LSS
Nozzle	bronze
Turbine water supply	316SS
Valves	Stainless steel
Gearbox	Bronze/316 Stainless steel
Cover	Stainless steel 316

ORION FIRE ENGINEERING PTY LIMITED

ABN 80 002 538 696

26A LYN PARADE PRESTONS NSW 2170 AUSTRALIA

Tel (61) 2 9426 7900 FAX (61) 2 8783 5400

Visit our Website www.orion-fire.com.au Email: sales@orion-fire.com.au