

Monitors

65mm Portable Ensign



Description

The Ensign Model 2530 65mm portable monitor is a stainless steel monitor with friction swivel locks. The monitor can be used with Orion Model 4000, 6000 and 8000 fog nozzles and Orion Foam Lord model FLD2-65 nozzles. It is not recommended that aspirating foam nozzles be used with these monitors. Tiller bar nozzle control allows easy nozzle movement.

Specifications

Maximum Flow:	3000 lpm
Horizontal Rotation:	90°
Vertical Movement:	+30° to +90°
Inlet Connection:	65mm BSP M
Outlet Connection:	65mm BSP M

ORION FIRE ENGINEERING PTY LIMITED

ABN 80 002 538 696

26A LYN PARADE PRESTONS NSW 2170 AUSTRALIA

Tel (61) 2 9426 7900


FAX (61) 2 8783 5400

Visit our Website www.orion-fire.com.au Email: sales@orion-fire.com.au

Materials of Construction

Waterway:	316 Stainless Steel
Swivels:	316 Stainless Steel
Balls:	Delrin
Grease Nipples:	316 Stainless Steel
Locking Knob:	Aluminium
Handle:	316 Stainless Steel
Fasteners:	316 Stainless Steel
Base:	Aluminium (Bronze optional)
Spikes:	Hardened tool steel

Friction Loss Curve

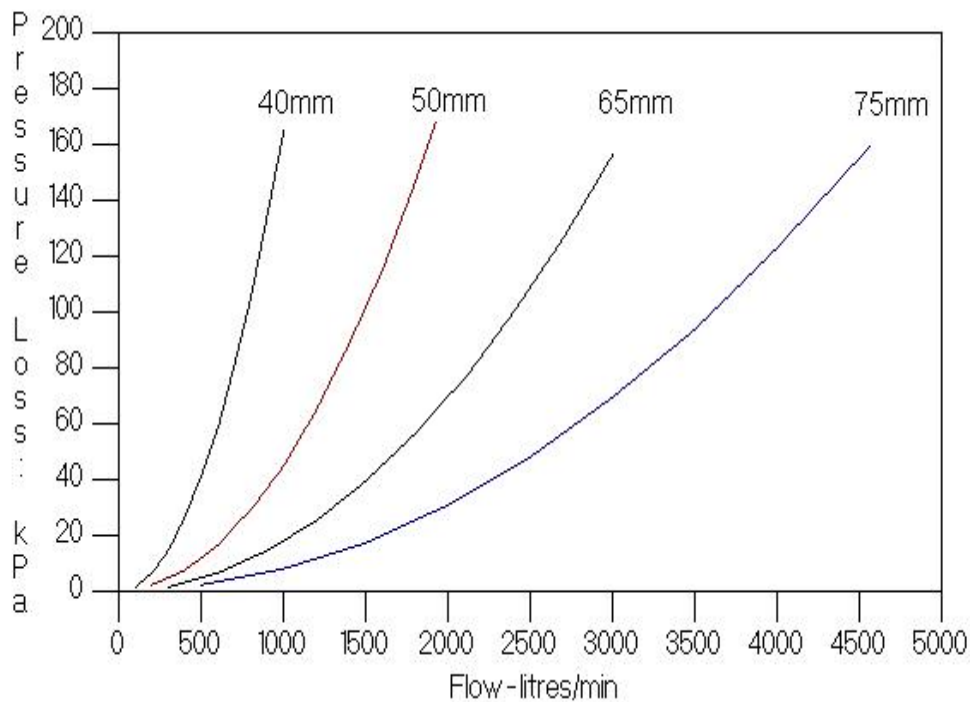

Options

Outlet Connection:	65mm BSP Male as Standard, 2.5" NHT optional.
Inlet Connection:	Single 65mm BSP Male as standard. A clapped twin inlet in hard anodised aluminium is optional. A range of hose couplings can be fitted.

Model 2530GA – Alloy ground base
Model 2530GB – Gunmetal ground base

ORION FIRE ENGINEERING PTY LIMITED

ABN 80 002 538 696

26A LYN PARADE PRESTONS NSW 2170 AUSTRALIA

Tel (61) 2 9426 7900 FAX (61) 2 8783 5400

Visit our Website www.orion-fire.com.au Email: sales@orion-fire.com.au